TOOLS & EQUIPMENT CATALOGUE

Trusted Repair, Retread & Wheel Service Solutions Since 1939



TECH... Providing World Class Products and World Class Customer Service!

TECH's Team is dedicated to providing great personal service. Whether it is product information, order entry assistance or shipping information, they are available to assist all TECH customers.



Phone:

+32 14 423 103



Website:

www.techeurope.com



Email:

techeurope@trc4r.com

World Class Customer Service ... Yet another reason TECH is the Global Tire Wheel Authority!

A TRC Company

Table of Contents

Tire Repair & Retread Service Tools

- Extruder Guns 4
- Air Tools & Accessories 5
- Carbide Cutters 7
- Buffing Wheels 8
- Buzzouts, Rasps & Gouges 11
- Brushes & Grinding Stones 14
- Buffing Blades 18
- Tire Repair Hand Tools 20
- Marking Tools & Regrooving 23
- Envelopes & Accessories 25

Workshop Equipment

- Bead Breakers & Accessories 28
- Mount/Demount Tools 29
- Tire Changing & Handling Equipment 32
- Vulcanizing Equipment 33
- Monaflex Tire Repair Systems 34
- Monaflex Vulcanizing Systems 35
- O-Rings & L-Rings 39
- Tire Inflation Tools & Accessories 40
- Storage 41



TIRE REPAIR & RETREAD SERVICE TOOLS

Extruder Guns

- High-quality Extruder Guns are available in 110V and 220V.
- Recommended for commercial truck retreading and OTR applications.
- Designed to extrude uncured rubber into damaged areas on rubber surfaces.
- Use with TRRS, LRRS, and other types of rope rubber.
- Strong steady flow with excellent tool life expectancy.
- New E-Line series features digital thermostat for precise temperature control.

e-line



Key Features of the TECH e-line

- Digital Thermostat – Stable, precise temperature control (+/- 5°)
- No premature vulcanization
- Easier cleaning after use, no rubber residue




Normal Extruder | TECH
260-685E (220V)
260-685E-110V-F (110V)

Weight:	11 lb. / 5 kg
Drill/Electric Power:	780W / 350W
Max Temperature:	248°F / 120°C
Rubber Production:	39.7 lb. per hour / 18 kg. per hour



Magnum Extruder | TECH
260-686E (220V)
260-686E-110V (110V)

Weight:	13.2 lb. / 6 kg
Drill/Electric Power:	780W / 350W
Max Temperature:	248°F / 120°C
Rubber Production:	53 lb. per hour / 24 kg. per hour



Giant Extruder | TECH
260-687E (220V)
260-687E-110V (110V)

Weight:	13.2 lb. / 6 kg
Drill/Electric Power:	780W / 800W
Max Temperature:	248°F / 120°C
Rubber Production:	61.7 lb. per hour / 28 kg. per hour



TECH-685P Extruder | CP
260-685P-220V-AP (220V)
260-685P-110V (110V)

Weight:	11 lb. / 5 kg
Drill/Electric Power:	400W / 350W
Max Temperature:	248°F / 120°C
Rubber Production:	33 lb. per hour / 15 kg. per hour



TECH-670P Extruder | Tubeless
260-670P (220V)
260-670P-110V (110V)

Weight:	13.2 lb. / 6 kg
Drill/Electric Power:	400W / 350W
Max Temperature:	248°F / 120°C
Rubber Production:	N/A



TECH-685EL Extruder | Bosch
260-685EL (220V)

Weight:	13.2 lb. / 6 kg
Drill/Electric Power:	550W / 350W
Max Temperature:	248°F / 120°C
Rubber Production:	39.7 lb. per hour / 18 kg. per hour



TECH-688-EM Earth Mover | TECH
260-688 (220V)

Weight:	24.25 lb. / 11 kg
Drill/Electric Power:	1150W / 800W
Max Temperature:	248°F / 120°C
Rubber Production:	88 lb. per hour / 40 kg. per hour

Air Tools & Accessories

- Powerful pneumatic tools and accessories designed for efficient tire repair and preparation.
- Also available: a versatile range of adaptors, chucks, arbors and tool carriers for use with cutters, grinding wheels, brushes and other tire repair tools.

Buffers


S1036


S1039


CP871C


CP873C


CP873C-HDES


CP873CK

Item No.	Description
S1036	LOW RPM GEAR HEAD REAR EXHAUST AIR BUFFER ideal for preparing all rubber surfaces. 4000 max. rpm at 90 psi. Threaded arbor 3/8", 24 thread. Optional S1037 rear exhaust kit available. Chuck and key sold separately.
S1039	High RPM Rear Exhaust Air Buffer excellent for preparing steel cables. 22,000 max. rpm at 90 psi. Threaded arbor 3/8", 24 thread. Optional S1037 rear exhaust kit available. Chuck and key sold separately.
CP871C	High Speed Tire Buffer designed for tire repair applications. 350 W motor produces 22,000 rpm with 3/8", 10mm chuck capacity. Features rear exhaust, speed control, lightweight composite housing and reinforced lock-off safety lever for comfortable operation.
CP873C	Low Speed Tire Buffer designed for tire repair applications. 350 W motor produces 3,000 rpm with 7/16", 11mm quick-change hex chuck. Features rear exhaust, speed control, lightweight composite housing and reinforced lock-off safety lever.
CP873C-HDES	Low Speed Heavy Duty Tire Buffer with extended neck, designed for heavy-duty tire applications. 500 W motor produces 3,500 rpm and features a 7/16" hexagonal quick-change slip chuck. Features rear exhaust, speed control, lightweight composite construction, reinforced lock-off safety lever and air swivel inlet.
CP873CK	Low Speed Tire Buffer Kit. Complete with CP873C low speed tire buffer, whip hose and exhaust hose, long and short arbor adaptors. 350 W motor produces 3,000 rpm. Features 7/16", 11mm quick-change hex chuck, rear exhaust, speed control, lightweight composite housing and reinforced lock-off safety lever.

Drills

Item No.	Description
S1035	500 RPM REVERSIBLE DRILL excellent for removing damaged rubber and steel. Complete with quick change chuck and exhaust kit. For use with carbide cutters 269-272, max. 90 psi.
S-1037M	Rear Exhaust Kit for S1035, S1036 and S1039


S1035


S-1037M

Air Hammer

Item No.	Description
S990	Rapid Action Air Hammer recommended for agricultural, truck and OTR repair installation. Develops 3,700 strikes per minute at 90 psi. Comes complete with S991 safety chuck holder.
S992*	Pneumatic Hammer Bit, 1/2"", 15mm Diameter


S990

*** Item not shown**

Grinders



CP7412



CP872



6158751130

Item No.	Description
CP7412	1/4", 6mm Pneumatic Die Grinder designed for body shop and maintenance applications. 420 W motor produces 22,000 rpm with 1/4", 6.4mm collet capacity. Features spindle lock for easy burr changes using one wrench, rear exhaust, ergonomic TPR grip, composite housing and safety lever for comfortable and controlled operation.
CP872	1/4", 6mm Pneumatic Die Grinder designed for general maintenance and high-speed grinding applications. 470 W motor produces 27,000 rpm with 1/4", 6.4mm collet capacity. Features durable aluminum alloy body, built-in air regulator, rear exhaust and streamlined safety lever. Includes 1/4" and 6mm collets.
6158751130	Exhaust Hose for grinders and sanders, designed to help remove dust and debris from the work area and improve air quality. Durable corrugated construction helps reduce exhaust noise without negatively affecting performance.

Air Vacuum

- Ensures quick and complete removal of buffing dust and other debris inside the tire.

Item No.	Description
S999	Quick Spiff Air Powered Vacuum for quick and complete removal of ground particles from the inner liner of the tire during the repair process. Self-contained one-piece vacuum comes complete with 16", 400mm hose, 3", 75mm dust brush and 9", 225mm crevice tool.



S999

Chucks & Adaptors

Item No.	Description
S1010C	Jacobs Chuck for S1036 and S1039
S1045	Quick Change Chuck for S1036 and S1039. Fits 3/8", 24 thread spindle



S1010C



S1045

Item No.	Description	Length (mm)	Shaft Size (in)	Thread Length (mm)
S1046	Quick Change Short Adaptor	—	3/8", 24 thread	13
S1046D	Quick Change Adaptor for RSB-3 Brush	—	—	—
S1046DNW*	Short Quick-Change Adaptor - Double Nut & Washer	—	—	—
S1047	Quick Change Long Adaptor	—	3/8", 24 thread	25
S1047XL	Quick Change Extra Long Adaptor	—	3/8", 24 thread	45
S1048	Drill Chuck Short Adaptor	40	3/8", 24 thread	12
S1049	Drill Chuck Long Adaptor	70	3/8", 24 thread	32

*Item not shown



S1046



S1047



S1047XL



S1046D



S1048



S1049

Item No.	Description	Hole Size (mm)	Hole Size (in)
S1040	Quick Change Adaptor for No. 270 and No. 270P Carbide Cutters	5.95	15/64"
S1041	Quick Change Adaptor for No. 271 and No. 271P Carbide Cutters	7.9	5/16"
S1041/38	Quick Change Adaptor for No. 271/38 and No. 272 Carbide Cutter	9.4	3/8"
S1043	1/8" Quick Change Adaptor	3.2	1/8"
S1044	1/4" Quick Change Adaptor	6.3	1/4"



S1040



S1041



S1044



S1041/38



S1043

Carbide Cutters

- Removes damaged steel cables within tire injuries.
- Made from high-quality carbide steel for efficient damage removal and long life.
- 1,200 RPM maximum.
- S1045 Quick Change Chuck recommended for use with adaptors listed.

Carbide Cutters

Item No.	Length (in)	Length (mm)	Injury Size (in)	Injury Size (mm)	Stem Shape	Adaptor
269E	3"	75	1/8"	3	Round (with notch)	S1043
269/4.5ER	3"	75	11/64"	4.5	Round	—
270ER	3"	75	1/4"	6	Round	S1044
271ER	4"	100	5/16"	8	Round	S1041
271/38ER*	4 9/16"	120	3/8"	10	Round	—
269/4.5E	3"	75	11/64"	4.5	Triangular	—
270PE	2"	50	1/4"	6	Triangular	S1044
270E	3"	75	1/4"	6	Triangular	S1044
271PE	3"	75	5/16"	8	Triangular	S1041
271E*	4"	100	5/16"	8	Triangular	S1041
271/38E	4 9/16"	120	3/8"	10	Triangular	—
272E	5"	125	1/2"	13	Triangular	—



Item No.	Length (in)	Length (mm)	Injury Size (in)	Injury Size (mm)	Stem Shape	Adaptor
269	3"	75mm	1/8"	3mm	Round (with notch)	S1043
C4,5*	4.5"	90mm	—	4.5mm	Triangular	—
270P	2"	50mm	1/4"	6mm	Triangular	S1040
270	3"	75mm	1/4"	6mm	Triangular	S1040
271P*	3"	75mm	5/16"	8mm	Triangular	S1041
271	4"	100mm	5/16"	8mm	Triangular	S1041
271/38	4 9/16"	120mm	3/8"	10mm	Triangular	S1041/38
272	5"	125mm	1/2"	13mm	Triangular	S1041/38



*Item not shown

Diamond-Cut Burrs

- Diamond-Cut Burrs are a quick and efficient way to remove loose wire when making a section repair.
- For best results use buffer with speeds of 20,000 to 30,000RPM

Item No.	Description	Lenght (in)	Lenght (mm)	Shaft Size (in)	Shaft Size (mm)	Adaptor
280	Mini Pointed Carbide Burr	1 1/4"	30	1/8"	3	S1043
282	Pointed End Carbide Burr	2"	50	1/4"	6	S1044
283	Mini-Router Carbide Burr	1 1/2"	40	1/8"	3	S1043
284	Router Carbide Burr	2 1/2"	65	1/4"	6	S1044
284C*	Coarse-Cut Router Carbide Burr	2 1/2"	65	1/4"	6	S1044
286	Ball-Shaped Carbide Burr, 3/4", 20mm diameter	2 3/4"	70	1/4"	6	S1044




*Item not shown

CAUTION: Always wear eye protection.

Buffing Wheels

- Designed for effective rubber removal and surface preparation during tire repair.
- Multiple wheel profiles and grit options provide flexibility for buffing, contouring and finishing applications.
- Specialised tools and accessories allow for controlled preparation of repair areas and hard-to-reach surfaces.
- S1045 Quick Change Chuck recommended for use with adaptors listed.


Flared Contour Wheels

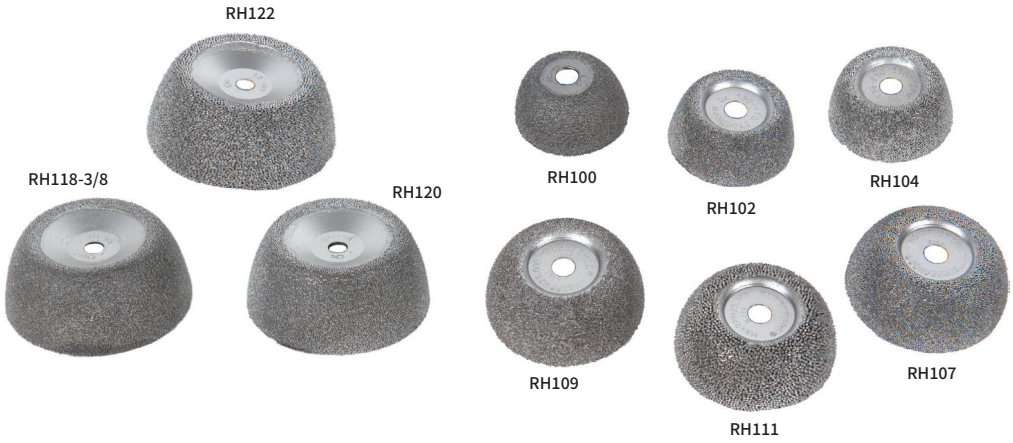

Item No.	Diameter (in/mm)	Width (in/mm)	Hole Size (in/mm)	Coating	Adaptor
RH100	1 3/4", 44.4	3/4", 19	3/8", 9.5	170 - Fine	S1046 /S1047Xl with Poly Plugs
RH102	2", 50.8	3/4", 19	3/8", 9.5	170 - Fine	S1046 /S1047Xl with Poly Plugs
RH104	2", 50.8	3/4", 19	3/8", 9.5	230 - Medium	S1046 /S1047Xl with Poly Plugs
RH107	2 1/2", 63.1	1 1/16", 26.9	3/8", 9.5	170 - Fine	S1046 /S1047Xl with Poly Plugs
RH109	2 1/2", 63.1	1 1/16", 26.9	3/8", 9.5	230 - Medium	S1046 /S1047Xl with Poly Plugs
RH111	2 1/2", 63.1	1 1/16", 26.9	3/8", 9.5	390 - Coarse	S1046 /S1047Xl with Poly Plugs
RH112*	3", 76.2	1 1/4", 31.7	3/8", 9.5	170 - Fine	S1046 /S1047Xl with Poly Plugs
OLVRH114+*	3", 76.2	1 1/4", 31.7	3/8", 9.5	230 - Medium	S1046
OLVRH116+*	3", 76.2	1 1/4", 31.7	3/8", 9.5	390 - Coarse	S1046
RH118-3/8	3 1/2", 88.9	1 1/2", 38.1	3/8", 9.5	170 - Fine	S1046 /S1047Xl with Poly Plugs
RH120	3 1/2", 88.9	1 1/2", 38.1	3/8", 9.5	230 - Medium	S1046 /S1047Xl with Poly Plugs
RH122	3 1/2", 88.9	1 1/2", 38.1	3/8", 9.5	390 - Coarse	S1046 /S1047Xl with Poly Plugs
RH129P*	4", 101.6	1 1/2", 38.1	3/4", 19	390 - Coarse	—

+ Denotes special order item.
* Item not shown

Extreme Flared Contour Wheels

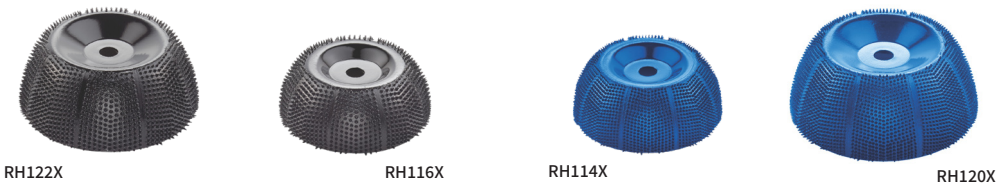

Item No.	Diameter (in/mm)	Width (in/mm)	Hole Size (in/mm)	Coating	Adaptor
RH114X	3", 76.2	1 1/4", 31.7	3/8", 9.5	Extreme 70 - Medium	S1046
RH116X	3", 76.2	1 1/4", 31.7	3/8", 9.5	Extreme 90 - Coarse	S1046
RH120X	3 1/2", 88.9	1 1/2", 38.1	3/8", 9.5	Extreme 70 - Medium	S1046
RH122X	3 1/2", 88.9	1 1/2", 38.1	3/8", 9.5	Extreme 90 - Coarse	S1046

Low-Profile Buffing Wheel

- Unique design allows buffing in low profile tires without risking sidewall damage.


RH140

Item No.	Diameter (in/mm)	Width (in/mm)	Hole Size (in/mm)	Coating	Adaptor
RH140	1 1/4", 31.7	3/4", 19	3/8"- 24 Thread	170 - Fine	S1046

Poly Plugs For Flared Contour Wheels

- Poly Plugs easily fit inside Contour Wheels, compensating for mounting inaccuracies.
- Reuseable Poly Plugs improve wheel life and reduce vibration for smoother, quieter, more comfortable operation.


RH156

RH154

RH152

Item No.	Diameter (in)	Diameter (mm)	Hole Size (in)	Hole Size (mm)	Adaptor
RH151*	2"	50.8	3/8"	9.5	S1047XL
RH152	2 1/2"	63.1	3/8"	9.5	S1047XL
RH154	3"	76.2	3/8"	9.5	S1047XL
RH156	3 1/2"	88.9	3/8"	9.5	S1047XL

*Item not shown

Retreading Sidewall Wheels


RH708

OLVRH708-50

OLVRH707-50

Item No.	Shape	Diameter (in)	Diameter (mm)	Bore (in)	Bore (mm)	Coating
OLVRH707-50	Donut Wheel	6	152.4	1	25.4	460 - Med. Coarse
RH708	Donut Wheel	6	152.4	1	25.4	390 - Coarse
OLVRH708-50	Donut Wheel	6	152.4	1	25.4	390 - Coarse
RH711	Donut Wheel	7.87	200	0.79	20	390 - Coarse
RH711-460	Donut Wheel	7.87	200	0.79	20	460 - Med. Coarse
RH708X	Donut Wheel	6	152.4	1	25.4	390 - Coarse
RH711X	Donut Wheel	8	203.2	2.36	60	90 - Coarse

Item No.	Shape	Diameter (in)	Diameter (mm)	Bore (in)	Bore (mm)	Grit
132032-18	Donut Wheel	4.01	102	0.74	19	18
132034-16	Donut Wheel	5.90	150	1.25	32	16
132031-18	Donut Wheel	2.99	76	0.62	16	18

Contour Cups

- TECH tungsten carbide buffing wheels and cups have an air-cooled design which permits faster, cooler and cleaner buffing and helps eliminate the burning of rubber.

Item No.	Ø or Length (in/mm)	Width (in/mm)	Hole (in/mm)	Grit	Adaptor
S2020	3", 75	1 1/2", 40	3/8", 10	16/36	S1046
S2021	3", 75	1 1/2", 40	3/8", 10	60	S1046
S2022	4", 100	1 1/2", 40	1/2", 13	36	–
S2023*	4", 100	1 1/2", 40	1/2", 13	60	–
S2027	2", 50	3/4", 20	3/8", 10	60	S1046

The maximum speed for items S2020 through S2027 is 5000 RPM.

S2027 designed with non-aggressive grit for passenger tire inner liner and tube buffing.

*Item not shown



Carbide Wheels

Item No.	Description	Adaptor
S1009	BC-2 WHEEL, a 2", 50mm diameter wheel for tube repairs and light work. 5000 RPM max.	S1046
S1011	BC-1 WHEEL, a 2 1/2", 65mm diameter wheel for tube repairs and light work. 5000 RPM max.	S1046
S2032	NO. 60 HB NICKEL CHROMIUM BUFFING WHEEL designed to outlast copper colored wheels. For texturizing of tubes and innerliners. 2 1/2", 65mm diameter, 3/8", 10mm arbor hole. 5000 RPM max.	S1046



Item No.	Type	Diameter (mm)	Width (mm)	Grit
TCW210-G16	Curved Profile	50	25	16
TCW210-G36	Curved Profile	50	25	36
TCW310-G16	Curved Profile	76	25	16
TCW310-G36	Curved Profile	76	25	36
TFW310-G16	Sidewall	75	25	16
TFW310-G36	Sidewall	75	25	36
TFW415-G16	Sidewall	100	40	16
TFW415-G36	Sidewall	100	40	36

The maximum speed is 5000 RPM.



Straight Profile Wheel

Item No.	Diameter (in)	Diameter (mm)	Width (in)	Width (mm)	Hole (in)	Hole (mm)	Coating/ Grit
CARB200	3	76	1	25	3/8"	9.5	230/36



Buzzouts, Rasps & Gouges


Buzzout Wheels

- Fully-rounded profile for free cutting and long-lasting performance.
- Excellent for bias tires and skiving on high-tread radial tires.
- Not recommended for contact with steel cord.




Item No.	Diameter (in/mm)	Width (in/mm)	Hole	Coating	Adaptor
RH300	2", 51.8	1/4", 6.3	3/8"- 24 Thread	230 - Medium	S1046
RH302	2", 51.8	1/4", 6.3	3/8"- 24 Thread	390 - Coarse	S1046
RH304	2", 51.8	3/8", 9.5	3/8"- 24 Thread	230 - Medium	S1046
RH306	2", 51.8	3/8", 9.5	3/8"- 24 Thread	390 - Coarse	S1046
RH308	2", 51.8	1/2", 12.7	3/8"- 24 Thread	230 - Medium	S1046
RH310	2", 51.8	1/2", 12.7	3/8"- 24 Thread	390 - Coarse	S1046
RH312	2", 51.8	3/4", 19	3/8"- 24 Thread	230 - Medium	S1046
RH314	2", 51.8	3/4", 19	3/8"- 24 Thread	390 - Coarse	S1046

S1045 Quick Change Chuck recommended for use with adaptors listed

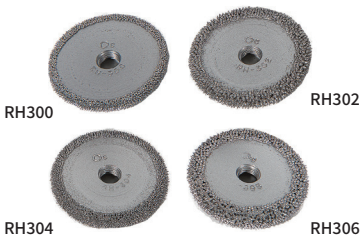

Tapered Cones, Balls, Pencil Rasp, Rotor Saw, 1/4" Shaft

- Larger spheres, tapers and the rotor saw are excellent for high-tread skiving.
- Smaller spheres are designed for chamfering around inner liner injuries to help prevent entrapped air.
- Nail hole reamers are designed for use on bias tires.

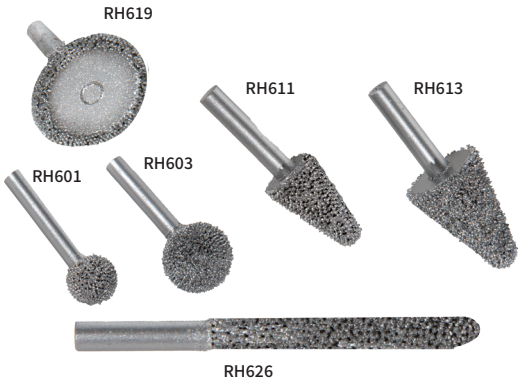

Item No.	Shape	Diameter (mm)	Head Length (mm)	Coating	Adaptor
RH601	Sphere	5/8", 15.8	-	330 - Coarse	S1044
RH603	Sphere	7/8", 22.2	-	330 - Coarse	S1044
RH605*	Sphere	1 1/8", 28.5	-	330 - Coarse	S1044
RH611	Taper	5/8", 15.8	1", 25.4	330 - Coarse	S1044
RH613	Taper	7/8", 22.2	1 1/4", 31.7	330 - Coarse	S1044
RH619	Rotor Saw	1 3/8", 34.9	1/4", 6.3	330 - Coarse	S1044
RH626	Nail Hole Reamer	1/4", 6.3	3", 76.2	330 - Coarse	S1044

*Item not shown
S1045 Quick Change Chuck recommended for use with adaptors listed

4-Piece 1/8" Shaft Repair Kit

- Better surface texture for a safer bond, and faster material removal for a quicker repair
- 4-Piece 1/8" Shaft Repair Kit containing Long Taper, Short Taper, Sphere, and Rotor Saw


Item No.	Shape	Diameter	Head Length	Coating
RH635	Long Taper	1/8", 3.1mm	3/4", 19mm	170 - Fine
	Short Taper	1/4", 6.3mm	1/2", 12.7mm	170 - Fine
	Sphere	3/8", 9.5mm	3/8", 9.5mm	170 - Fine
	Rotor Saw	3/4", 19mm	1/8", 3.1mm	170 - Fine



Round Faced Rasps

Item No.	Ø or Length	Width	Hole	Grit
S2000	2", 50mm	1/4", 6mm	3/8"- 24 Thread	16
S2001	2", 50mm	1/4", 6mm	3/8"- 24 Thread	36
S2002	2", 50mm	1/2", 13mm	3/8"- 24 Thread	16
S2003	2", 50mm	1/2", 13mm	3/8"- 24 Thread	36
S2004	2", 50mm	3/4", 20mm	3/8"- 24 Thread	16
S2005	2", 50mm	3/4", 20mm	3/8"- 24 Thread	36
S2204	2", 50mm	1/8", 3mm	3/8"- 24 Thread	16
2050147-G16	4", 100mm	3.5mm	3/8", 9.5mm	16

The maximum speed for items S2000 through S2204 is 5000 RPM.
Use S1046 Adaptor.

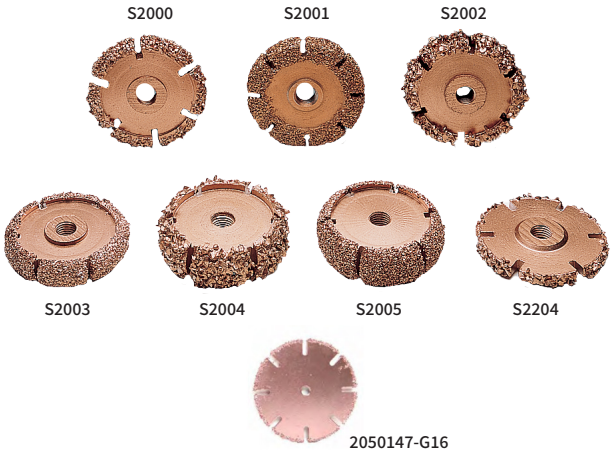

Pencil Rasps & Tapered Cone Rasps

Item No.	Ø or Length	Width	Hole	Grit
S2006	2 1/2", 65mm	1/4", 6mm	—	16
S2007	2 1/2", 65mm	1/4", 6mm	—	36
S2008	4", 100mm	3/4", 20mm	3/8"- 24 Thread	16
S2009	4", 100mm	3/4", 20mm	3/8"- 24 Thread	36
S2010	2", 50mm	1", 25mm	3/8"- 24 Thread	16
S2011	2", 50mm	1", 25mm	3/8"- 24 Thread	36
2218	4 1/64", 102mm	—	6	16
2217	4 1/64", 102mm	—	6	36

The maximum speed for items S2006 through S2010 is 5000 RPM.
S2006 and S2007 use S1044 Adaptor. S2008 - S2010 use S1046 Adaptor.



Item No.	Shape	Diameter (mm)	Length (mm)	Shaft size (mm)	Grit	Adaptor
132100-16	Sphere	20	55	6	16	S1040

Buffing Rasps

Item No.	Description	Diameter	Width	Grit Size
SP208/16	Fanned Face Rasp	2"	1/2"	16


Use S1046 Adaptor.



Flat Discs

- For inner liner preparation for large repairs, OTR sidewall buffing & pre cured tread preparation.

Item No.	Size (mm)	Hole (mm)	Grit
2538-G16	Ø100 × 2	Ø16	16
2538-G36	Ø100 × 2	Ø16	36
2540-G16	Ø150 × 2	Ø13	16
2540-G36	Ø150 × 2	Ø13	36
2541-G16	Ø180 × 2	Ø22	16
2541-G36	Ø180 × 2	Ø22	36
132110-16	Ø125 × 2	Ø22	16
132110-36	Ø125 × 2	Ø22	36
132110-23	Ø125 × 2	Ø22	23

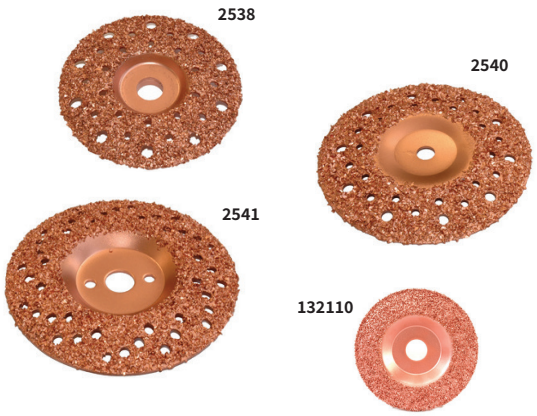

Gouges

- Professional gouges for tire repair and retreading, available in various shapes and sizes.
- Lightweight construction and cooler running design enhances the performance and life of these rubber cutting gouges.
- The razor-like surface quickly removes large quantities of rubber.

S2042



S2045



S2046



Item No.	Description	Diameter (in)	Diameter (mm)	Hole Size (in)	Hole Size (mm)	Box Qty.	Adaptor
S2042	Thin Wall Rotary Gouge, No Notch	2	50	3/8	10	2	S1046
S2045	Rotary Gouge	1 1/4	30	3/8	10	3	S1046
S2046	Micro Rotary Gouge	3/4	20	3/8	10	4	S1046

S1045 Quick Change Chuck recommended for use with adaptors listed

Gouge Accessories

Sharpening & Cutting Tools


- Essential tools and accessories for gouge maintenance and rubber cutting applications.

Item No.	Description
4793	Gouge Sharpener
4794	Sharpening Wheel, Ø25 mm — Box Of 6

479-4



479-3




Grooving Blades

- For use in Earthmover retread process" & “Blades can be heated and used to shape the tread pattern, prior to curing.

Item No.	Description
4795	Grooving Knife, R25
4796	Grooving Knife, R15
4797	Grooving Knife, R30



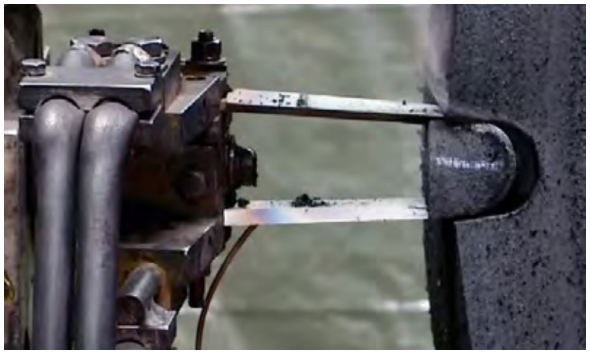



Brushes & Grinding Stones


Brushes

Encapsulated Wire Brushes

- Encapsulated wire brushes are a critical component to performing section repairs.
- Can be used to remove rubber surrounding steel cables, allowing damaged steel to be removed without creating excess scorch.
- Brushes are ideal for cleaning buffed surfaces and skives.

Item No.	Description	Adaptor
S890	Polyurethane Encapsulated Brush to remove rubber around steel cables. 2", 50mm diameter, 5,000 rpm max. 1/2", 13mm arbor hole with 3/8", 10mm reducer.	S1046
TECHS891	Polyurethane Encapsulated Brush to remove rubber around steel cables. 3", 75mm diameter, 5,000 rpm max. 1/2", 13mm arbor hole with 3/8", 10mm reducer.	S1046
S897	Rubber Encapsulated Brush to remove rubber around steel cables. 2", 50mm diameter, 5,000 rpm max. 1/2", 13mm arbor hole with 3/8", 10mm reducer.	S1046
404*	Rubber Encapsulated Brush, 3", 75mm diameter, 12mm width, ½", 12.7mm arbor hole	-
411	PVC Encapsulated Wire Brush, 3", 75mm diameter, 20mm width, 14mm arbor hole	-

*Item not shown

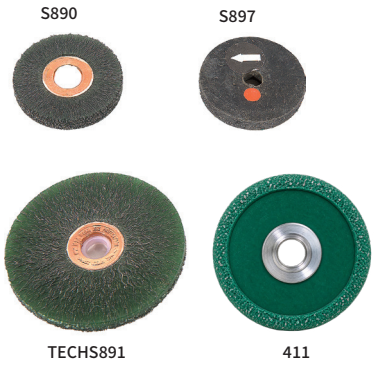

Wire Brushes

- Wire brushes are ideal for cleaning buffed surfaces and skives.


Item No.	Description
TECHS892	Texture Brush, includes (2) 3", 75mm brushes and (2) 2", 50mm flat washers to keep bristles firm. 5,000 rpm max.
TECHS894	Rim Cleaning Brush, 2", 50mm diameter. 5,000 rpm max.
TECHS896	Skive Brush removes scorched rubber from the injury channel. ½", 13mm diameter, .005 wire. 5,000 rpm max.
628	CYLINDRICAL BRUSH, 8mm diameter, 80mm length, 6mm stem.
S9015	Ring Brush, 3½", 90mm diameter, 0.15mm wire thickness, 14mm arbor hole.
S9035*	Ring Brush, 3½", 90mm diameter, 0.35mm wire thickness, 14mm arbor hole.
393	Wire Brush With Stem, 60mm diameter, 20mm width, 6mm stem.
394	Wire Brush With Stem, 40mm diameter, 10mm width, 6mm stem.

*Item not shown



Twisted Wire Brush

Item No.	Description
S7606	TWISTED WIRE BRUSH, 3", 76mm diameter, 6mm width, 3/8" arbor hole.
S1009	TWISTED WIRE BRUSH, 4", 100mm diameter, 9mm width, 3/8" arbor hole.

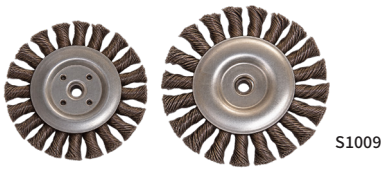

S7606 S1009

Brass Brushes

- Specialist brass brushes for cleaning and preparing tire surfaces for professional retread applications.

Item No.	Description
S8154*	BRASS BRUSH, 6", 150mm diameter, 45mm width, 77mm arbor hole.
S8165	BRASS BRUSH, 6", 160mm diameter, 45mm width, 77mm arbor hole.
S8167*	BRASS BRUSH, 6", 160mm diameter, 60mm width, 77mm arbor hole.
S82371*	BRASS BRUSH, 9", 230mm diameter, 60mm width, 100mm arbor hole.

*Item not shown



S8165

Brushes for Rubber Dust

Item No.	Description
626	BRUSH FOR RUBBER DUST, 80mm height, 10mm width, horse hair, without wings.



626

Grinding Stones

- Aluminium oxide grinding stones designed for accurate preparation of tire repair areas.
- Available in a range of shapes, sizes and grit options to suit various grinding requirements.
- Recommended for removing loose steel around tire injuries prior to repair.

Aluminum Oxide Stones

Code	Dimensions (in/mm)	Shaft Size (in/mm)	Colour	Grit	Max RPM
S870	Ø10.5	Ø 1/8", 3	White	60	30,000
S872S	Ø6 × 25	1/4", 6.3	White	60	47,000
S874	Ø13 × 6	Ø 1/8", 3	White	60	30,000
S875	Ø20 × 20	Ø 1/4", 6	White	60	33,500



Conical Stones

Code	Dimensions (mm)	Shaft Size (mm)	Colour	Grit
360	Ø8 × 25	Ø6	White	80
360M*	Ø8 × 25	Ø6	Brown	46
375B	Ø10 × 30	Ø6	White	80
375M	Ø10 × 30	Ø6	Brown	46
375R*	Ø10 × 30	Ø6	Pink	60
374	Ø20 × 40	Ø6	White	80
359*	Ø20 × 65	Ø6	White	80
359M*	Ø20 × 65	Ø6	Brown	80

*Item not shown
Max. RPM is 21,000



Spherical Stones

Code	Dimensions (mm)	Shaft Size (mm)	Colour	Grit
358	Ø20	Ø6	White	80
366	Ø35	Ø6	Green	30
371	Ø38	Ø6	White	36
39004159*	Ø40	—	White	—

*Item not shown
Max. RPM is 21,000



Cylindrical Stones

Code	Dimensions (mm)	Shaft Size (mm)	Colour	Grit
354R	Ø10 × 30	Ø6	Pink	60
377	Ø50 × 12	Ø6	White	80
377N*	Ø50 × 12	Ø6	Black	30

* For textile tires
Max. RPM is 21,000



CAUTION: Always wear eye protection.

Discs

Code	Dimensions (mm)	Shaft Size (mm)	Colour	Grit
372M*	Ø30	Ø6	Brown	46
372R*	Ø30	Ø6	Pink	60
372B	Ø30	Ø6	White	80
356	Ø34 × 6	Ø6	White	80
373M	Ø35	Ø6	Brown	46
373R	Ø35	Ø6	Pink	60
373G	Ø35	Ø6	Grey	60
373B	Ø35	Ø6	White	80
355R	Ø40 × 10	Ø6	Pink	60
355G*	Ø40 × 10	Ø6	Grey	60
355M*	Ø40 × 10	Ø6	Brown	46
355	Ø40 × 10	Ø6	White	80
353B	Ø50	Ø6	White	80
353R*	Ø50	Ø6	Pink	60



373M



373R



355



372B



373B



373G



356



355R



353B

Code	Dimensions (mm)	Hole Size (mm)	Colour	Grit
37701*	Ø75 × 7	Ø9.53	White	80
37702	Ø75 × 7	16	White	80
387-1-80G*	Ø90 × 12	Ø14	White	80
387-H14-G24*	Ø100 × 10	Ø14	Grey	24



37702

CAUTION: Always wear eye protection.

*Picture not shown

Grinding Stone Accessories

Item No.	Description
1127	Blade Sharpener Grindstone 150



1127


Buffing Blades

- Produced in Italy with high-quality German C100 steel.
- Made to ensure the best buffing performance and the longest life.

2020013




2020014



2020015



2020018



2020019



2020020



2020020S




2020023



2020023B



2020026



Item No.	Description	Blades per Set	Sets per Box	Blades per Box	Weight per Box
2020013	I-156-17/18	32	50	1600	17.5 kg
2020014	Long Life II US (I-4-20)	28	50	1400	25 kg
2020015	I-4-25	28	50	1400	25 kg
2020018	Long Life II Europe	28	50	1400	25 kg
2020019	I-115-20	25	50	1250	25 kg
2020020	I-115-25	25	50	1250	25 kg
2020020S	I-115-25 Supervent	25	50	1250	25 kg
2020023	Long Life III	30	50	1500	25 kg
2020023B	Long Life III B	30	50	1500	25 kg
2020026	I-6	6	1	6	0.2 kg

- Produced in the USA, using top quality steel in accordance with the latest manufacturing specifications.

Rocket R4 Rasp, 9" with 4 Segments - Pin Ø: 1/4" - 6.35mm

Item No.	Description	Number of blades per set	Number of sets per box	Number of blades per box
111118	R-4-16 Special Jet	28	30	840
111119	R-4-20 Special Jet	28	30	840
111121	R-4-20 Super Cool	28	30	840
111116	R-4-25 Special Jet	28	30	840
111120	R-4-25 Super Cool	28	30	840
111138	Apollo II (UNIVERSAL)	28	30	840
111173	Gemini II	28	30	840

Rocket R115 Rasp, 11.5" with 5 Segments

Item No.	Description	Number of blades per set	Number of sets per box	Number of blades per box
111106	R-115-16 Special Jet	25	30	750
111103	R-115-24 Regular Jet	25	30	750
111107	R-115-20 Special Jet	25	30	750
111108	R-115-20 Super Cool	25	30	750
111176	R-115-22 Special Jet	25	30	750
111104	R-115-25 Special Jet	25	30	750
111105	R-115-25S Super Cool	25	30	750
111171	Gemini I	25	30	750

Rocket Saturn III Rasp, 11.5" with 6 Segments

Item No.	Description	Number of blades per set	Number of sets per box	Number of blades per box
111141	S-115-20 Special Jet	30	30	900
111143	S-115-20 Super Cool	30	30	900
111175	S-115-22 Special Jet	30	30	900
111140	S-115-25 Special Jet	30	30	900
111142	S-115-25 Super Cool	30	30	900
111137	Apollo III	30	30	900

Saturn II Refills

Item No.	Description	Number of blades per set	Number of sets per box	Number of blades per box
111172	Gemini II/SII	28	30	840
111136	Apollo II	28	30	840

R-6 Rasps

Item No.	Description	Number of blades per set	Number of sets per box	Number of blades per box
111133	R-6 Standard	6	30	180

Tire Repair Hand Tools

Stitchers, Scrapers & Cutting Tools

Stitchers

- Heavy-duty knurled stitchers designed to firmly roll repair materials into place, helping ensure proper adhesion and eliminate trapped air during tire repair.

Item No.	Description	Dimensions
938*	Stitcher	38mm x 0.8mm
3-102-1	Plastic Handled Stitcher	38mm x 3mm
3-102-2	Wood Handled Stitcher	38mm x 3mm
3-102-3	Wood Handled Stitcher	50mm x 6mm
3-102-7	Wood Handled Stitcher	51mm x 4mm



Scrapers

- Durable scrapers designed to quickly remove contaminants and prepare repair areas for optimal adhesion.

Paring Knives


Item No.	Description
933	Rubber Scraper
4631	Paring Knife 9 Teeth
4632	Paring Knife 1 Tooth
4633	Paring Knife 1 Tooth
4634	Double Tooth Paring Knife


Blades Holders

Item No.	Description
459	Blade Holder / Car Blades With Adjustable Spacer
4591	Blade Holder / Car Blades Flat
4592	Blade Holder / Car Blades Mod. B&J
4594	Blade Holder For 4 Teeth Blade
461	Blade Holder / Car Blades Without Adjustable Spacer
462	Blade Holder / Truck Blades Flat
4621	Blade Holder For Truck With Adjustable Spacer

Blades

Item No.	Description
4593	Blades B&J
463	Truck Blades For Matteuzzi Machine
4635	Blade Truck 14 Teeth
464	Car Blades 7 Teeth
465	Car Blades 9 Teeth
4651	Car Blades 18 Teeth
466	Curved 4 Teeth Blade

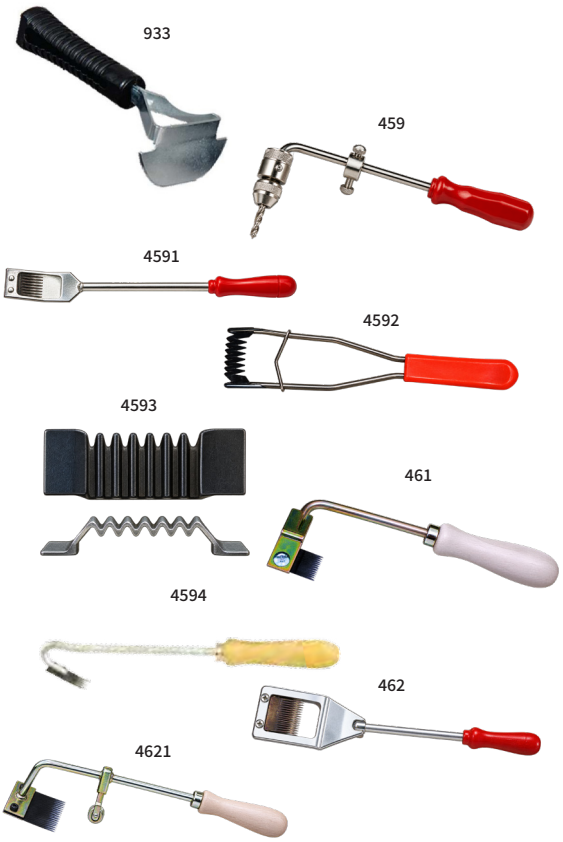

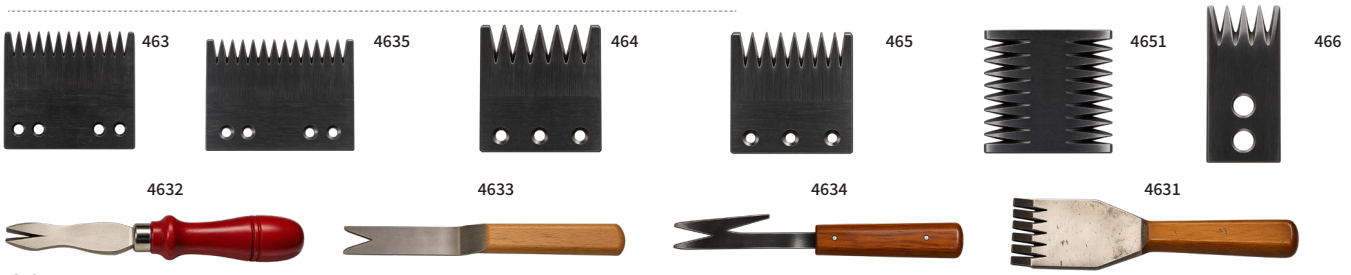

Cutting Tools

Item No.	Description	Box Qty.
480	Straight Blade Knife 5" / 120 mm	Ea.
481*	Straight Blade Knife 6" / 150 mm	Ea.
4811*	Straight Blade Knife 8" / 220 mm	Ea.
482	Crescent-Shaped Knife 8" / 220 mm	Ea.
486	Hook Knife	Ea.
487	Stanley Knife	Ea.
488	Spare Blade for 487	Ea.
4912	Shears for Rubber 8" / 220 mm	Ea.
940	X2T Taper Skiving Knife	Ea.
941	X1Y Extra Curve Skiving Knife	Ea.
942	X3N Round Point Flexible Skiving Knife	Ea.

*Item not shown



Probes, Awls, Spiral Cement & Packing Tools

- Premium-quality tools and accessories engineered for reliability and long service life.
- Developed to simplify tire repair tasks and improve workshop efficiency.

Item No.	Description
903*	Reamer Metal T-Handle
R023	Rasp Knurled Probe, 3 1/8", 80mm Blade Length
915	Spiral Cement Tool, Blade Length 95mm
4-208N01	Straight Handed Spiral Reamer, Blade Length 95mm
TRT105	Colour Coded Injury Measuring Tool
918	Duck Bill Awl, 4", 100mm Length
919	Pointed Awl, 8", 200mm Length
492	All Purpose Pointed Awl, Blade Length 110mm
848	Pliers, 9", 220mm
848-1	Pliers, 10", 250mm
848-2	Pliers, 11", 280mm

*Item not shown



Insert Tools & Replacement Needles

Item No.	Description
925	Permacure Passenger Tool, 2 1/8", 54mm
926B	Passenger Replacement Needle
925T	Permacure Truck Tool, 2 3/4", 70mm
927B	Truck Replacement Needle
925E	Permacure Earthmover Tool, 6", 150mm
928B	Earthmover Replacement Needle
928BTS	Earthmover Replacement Needle Top Split
TRT95P	Pistol Grip Probe/Rasp, 95mm
4-208N06	Straight Handed Closed-Eye Needle



Applicators & Material Cleaning

Item No.	Description	Specification
6975-968LB*	Cement Canister 1 Liter With Brush & Lid	1 Quart, 945ml
697-968RLB	Replacment Lid & Brush for 6975-968LB	—
969	Spray Bottle	16 oz (470 ml)
964	Rim Ease Swab	15" OAL (375 mm)
971	Angled Lube Brush	—
23005*	Premium Lube Brush	50mm
24005	Standard Lube Brush	50mm
1152	Brush	Ø55 mm
590	Brass Brush	—
TECH966*	Whitewall Cleaning Brush With Brass Bristles	—
TECH30515*	Wire Wheel Preparation Brush	—
1153	Rubber Hammer	—

*Item not shown



Other Tools

Item No.	Description
VH666	Tread Depth Gauge
380-269	Inspection Lamp
5-301	Tire Mounting Protector
777*	Wheel Rubber Removal Tape

*Item not shown



Marking Tools & Regrooving

Marking tools

Tire Crayons & Chalk

Item No.	Description	Box Qty.
948	MARKAL B PAINTSTIK® WHITE Solid Paint Marker	12
948Y	MARKAL B PAINTSTIK® YELLOW Solid Paint Marker	12
951	MARKAL B PAINTSTIK® HEX WHITE Solid Paint Marker	12
951Y	MARKAL B PAINTSTIK® HEX YELLOW Solid Paint Marker	12



948

948Y


951

951Y

Tire Brander & Accessories

- Heavy-duty 1000W tire brander featuring a truncated conical head with 25 mm external numbers from 0–9, plus a customizable front face for fixed numbers and letters.

Item No.	Description
815	Tire Brander
817	Letters, Numbers & Symbols for 815 Tire Brander, 25mm
816	Replacement Heater for 815 Tire Brander

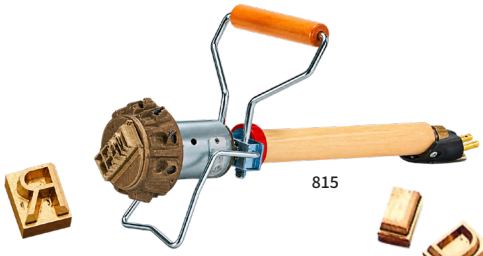

815



817

Regroovers

Built for reliability and ease of use, PSO Regroovers support professional tire maintenance across a wide range of applications.

PS15 Standard

- Featuring 370W of power, four heating positions and a zero setting, the PS15 Standard is a robust and reliable regrooving tool trusted by tire professionals worldwide.
- Use with C1 – C5 and R1 – R5 blades.



Item No.	Description	Weight
PS15	Regroover Standard	5.2kg
15011E	Replacement Head - PS15	-

PS15 Truckstar Plus

- Designed for high-precision regrooving, the PS15 Truckstar Plus offers adjustable heat control, 500W of power and energy-saving standby technology.
- Use with C1 – C5 and R1 – R5 blades.



Item No.	Description	Weight
PS15T	Regroover Truckstar Plus	5.4kg

PS15 OTR

- Built for demanding OTR tire applications, the PS15 OTR combines a powerful 1000W transformer with five heating positions and a zero setting for dependable performance.
- Specially developed for intensive regrooving applications using R5, C5 and C6 blades.




Item No.	Description	Weight
PS15OTR	Regroover OTR	6.5kg

Regrooving Blades

- Blades are made from high-grade steel with doublesided sharpening for optimal durability and cutting precision.

Item No.	Shape	Dimensions (mm)
PS15/C-1	Angle Blade	3-5
PS15/C-2	Angle Blade	6-10
PS15/C-3	Angle Blade	8-12
PS15/C-4	Angle Blade	10-14
PS15/C-5	Angle Blade	12-17
PS15/C-6	Angle Blade	20–28
PS15/R-1	Round Blade	3-5
PS15/R-2	Round Blade	5-11
PS15/R-3	Round Blade	7-13
PS15/R-4	Round Blade	9-16
PS15/R-5	Round Blade	11-18

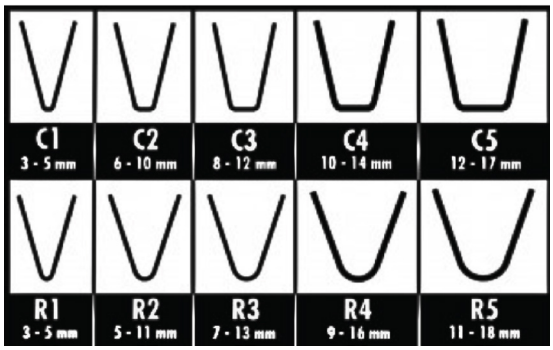

Envelopes & Accessories

Salvadori Inner Envelopes CMT Model

Item No.	Model	Outer Diameter Bead/Bead	Suggested Tire Size
5542	ALL-IN (IN-11)	1300 x 950 x 500 mm	16.5-22.5 • 18-22.5 • 425/65-22.5 • 445/65-22.5
5543	ALL-IN (IN-9)	1200 x 560 x 940 mm	295/75-24.5 • 11-24.5 • 305/80-24.5
5544	ALL-IN (IN-8)	1150 x 930 x 480 mm	315/80-22.5 • 385/65-22.5 • 13-22.5 • 15-22.5 • 14.80-20 • 365/80-20 • 1200-20 • 1300-20 • 13.80-20
5546	ALL-IN (IN-7)	1080 x 900 x 480 mm	11-22.5 • 1000-20 • 12-22.5 • 295/80-22.5 • 1100-20 • 275/80-22.5 • 305/70-22.5 • 315/75-22.5 • 385/55-22.5 • 425/55-19.5 • 455/45-22.5
5547	ALL-IN (IN-4)	950 x 465 x 720 mm	265/70-19.5 • 285/70-19.5
5548	ALL-IN (IN-5)	1030 x 850 x 480 mm	825-20 • 900-20 • 1000-20 • 10-22.5 • 305/70-19.5 • 305/60-22.5 • 12-16.5 • 315/60-22.5 • 255/70-22.5 • 275/70-22.5 • 285/70-22.5 • 305/70-22.5
5549	ALL-IN (IN-3)	880 x 380 x 700 mm	825-16 • 9.5-17.5 • 10-17.5
5550	ALL-IN (IN-2)	800 x 670 x 380 mm	750-15 • 700-16 • 750-16 • 215/75-16 • 225/75-16 • 8-17.5 • 8.5-17.5 • 9-17.5 • 205/75-17.5 • 215/75-17.5 • 235/75-17.5
5551	ALL-IN (IN-1)	700 x 315 x 600 mm	195-14 • 250/70-15 • 650-16

Salvadori Outer Envelopes CMT Model

Item No.	Model	Outer Diameter Bead/Bead	Suggested Tire Size
5530	ALL-IN (EX-11)	1280 x 650 mm	1200-20 • 13-22.5 • 385/65-22.5 • 10/11.00-22 • 1200-24
5532	ALL-IN (EX-9)	1230 x 670 mm	315/80-22.5 • 11.00-20 • 13-22.5 • 385/65-22.5
5534	ALL-IN (EX-7)	1130 x 617 mm	11-22.5 • 275/80-22.5 • 1000-20 • 305/70-19.5 • 295/80-22.5 • 12-22.5 • 1100-20
5536	ALL-IN (EX-5)	1030 x 520 mm	265/70-19.5 • 10-15 • 8-22.5 • 750-20 • 825-20
5538	ALL-IN (EX-3)	930 x 500 mm	825-16 • 8-17.5 • 825-15 • 215/75-17.5 • 245/70-17.5
5540	ALL-IN (EX-1)	870 x 420 mm	700-15 • 750-16 • 205-75

Universal Inner Envelopes

- Designed for use during the tire retreading process, universal inner envelopes are fitted inside the tire to help create and maintain the vacuum required during curing.
- Available in a range of sizes to suit different tire dimensions and applications.

Item No.	Size	Suggested Tire Size
51091	1340 x 560 x 970	1100-24 • 1200-24 • 1300-24 • 12-24.5 • 1400-24
5110	1300 x 500 x 900	16.5-22.5 • 18-22.5 • 425/65-22.5 • 445/65-22.5
51101	1160 x 480 x 900	12.00-20 • 13.00-20 • 13.80-20 • 14.80-20 • 365/80-20 • 15-22.5 • 385/65-22.5 • 1400-20
5111	1200 x 560 x 870	11.00-24 • 12.00-24 • 11-24.5 • 12-24.5 • 285/75-24.5 • 295/75-24.5 • 305/75-24.5 • 315/75-24.5 • 285/80-24.5 • 295/80-24.5 • 305/80-24.5
51111	1180 x 580 x 940	11-24.5
5112	1100 x 480 x 860	1100-20 • 1200-20 • 1100-22 • 425/55-19.5 • 12-22.5 • 13-22.5 • 15-22.5 • 305/70-22.5 • 315/75-22.5 • 315/80-22.5 • 385/65-22.5 • 315/70-22.5
5113	1060 x 480 x 810	11-22.5 • 275/80-22.5 • 295/80-22.5 • 455/45-22.5 • 385/55-22.5
5114	1010 x 480 x 790	900-20 • 1000-20 • 10-22.5 • 11-22.5 • 305/70-19.5 • 255/70-22.5 • 275/70-22.5 • 285/70-22.5 • 305/70-22.5 • 12-16.5 • 8.25-20 • 305/70-19.5 • 305/60-22.5 • 315/60-22.5 • 445/45-19.5
5115	960 x 440 x 690	265/70-19.5 • 285/70-19.5 • 435/50-19.5
51151	880 x 380 x 675	825-15 • 825-16 • 9.5-17.5 • 10-17.5 • 245/70-19.5 • 235/75-19.5
5116	780 x 400 x 640	7.00-16 • 750-16 • 215/75-16 • 225/75-16 • 8.5-17.5 • 9-17.5 • 9.5-17.5 • 205/75-17.5 • 215/75-17.5 • 7.50-15 • 8-17.5 • 235/75-17.5
5117	700 x 315	195-14 • 205-14 • 215-14 • 250/70-15 • 7.00-15 • 10-16.5 • 185/75-16 • 195/75-16 • 6.00-16 • 6.50-16 • 205/75-16

New Generation Outer Envelopes

- Designed for the tire retreading process, New Generation Outer Envelopes provide reliable coverage around the tire to support the vacuum required during curing.
- Available in a range of ST models and sizes to accommodate different tire dimensions and retreading applications.

Item No.	Model	Outer Diameter Bead/Bead	Suggested Tire Size
5399	ST 44 x 32	1143 x 790 mm / 45 x 31 in	1200-20 • 1300-20 • 365/80-20 • 13-22.5 • 15-22.5 • 385/65-22.5 • 285/75 • 445/65-22.5 • 1200-24 (SL 12/13)
54001	ST 42 x 28	1080 x 710 mm / 42.5 x 27.9 in	1100-20 • 12-22.5 • 385/65-22.5 • 315/80-22.5 (SL 11/12)
5401	ST 41 x 28	1148 x 715 mm / 45.2 x 28.1 in	1100-20 • 11-24.5 • 315/80-22.5 (SL 11)
5402	ST 40 x 26	1066 x 670 mm / 42 x 26.4 in	1000-20 • 275/80-22.5 • 295/75-22.5 • 295/80-22.5 • 285-75-24.5 • 11-22.5 (SL 10)
5403	ST 38 x 23	1020 x 600 mm / 40.2 x 23.6 in	305/70-19.5 • 825-20 • 900-20 • 10-22.5 • 275/70-22.5 • 305/60-22.5 (SL 9)
5404	ST 35 x 25	941 x 620 mm / 37 x 24.4 in	285/70-19.5 • 265/70-19.5 • 245/70-19.5 (SL 8)
5405	ST 31 x 20	790 x 508 mm / 31.1 x 20 in	205/75-17.5 • 8-17.5 • 750-16 • 225/70-17.5 • 825-16 (SL 7)
5406	ST 28 x 17	738.8 x 434 mm / 29.1 x 17.1 in	600-16 • 650-16 • 700-16
5407	ST 35 x 21	941 x 620 mm / 37 x 24.4 in	265/70-19.5 • 245/70-19.5

Outer Envelopes

- Outer envelopes are designed for use during the tire retreading process, enclosing the tire to create the vacuum conditions required during curing.
- Available in a wide range of sizes to accommodate different tire dimensions and applications.

Item No.	Model	Outer Diameter x Bead/Bead	Suggested Tire Size
5073	SL - 14	1238 x 965 mm / 48 x 38 in	14.00-24 • 14.00-25
5074	SL - 13	1130 x 800 mm / 44.4 x 31.5 in	445/65-22.5 • 1200-24 • 385/65-22.5 • 15-22.5 • 445/65-19.5 • 13-22.5
5088	SL - 12	1160 x 780 mm / 45.6 x 30 in	1200-20 • 1300-20 • 365/80-20 • 13-22.5 • 15-22.5 • 385/65-22.5 • 285/75-24.5
5089	SL - 11/12	1067 x 710 mm / 42 x 28 in	1100-20 • 1200-20 • 1100-22 • 455/45-22.5 • 12-22.5 • 315/80-22.5 • 11-24.5 • 385/55-22.5 • 445/65-19.5
5090	SL - 11	1020 x 700 mm / 40 x 27.5 in	1100-20 • 12-22.5 • 315/75-22.5 • 11-22.5 • 435/50-19.5
5091	SL - 10	1000 x 680 mm / 39.3 x 26.7 in	1000-20 • 11-22.5 • 275/70-22.5 • 295/80-22.5 • 305/70-22.5 • 315/70-22.5 • 425/55-19.5 • 315/60-22.5 • 275/80-22.5
5092	SL - 9	960 x 610 mm / 37.8 x 24 in	900-20 • 10-22.5 • 305/70-19.5 • 305/60-22.5
5093	SL - 8	945 x 570 mm / 37.4 x 22.4 in	700-20 • 750-20 • 825-20 • 8-22.5 • 9-22.5 • 305/70-19.5 • 255/70-22.5
5094	SL - 78	890 x 590 mm / 35 x 23.2 in	285/70-19.5 • 650-20 • 900-15 • 10-15 • 10-17.5
5095	SL - 76	840 x 540 mm / 33 x 22 in	825-16 • 245/70-19.5 • 265/70-19.5 • 825-15
5096	SL - 7	795 x 500 mm / 31.3 x 20 in	215/75-16 • 225/75-16 • 215-16 • 750-16 • 205-16 • 12-16.5 • 235/70-19.5 • 245/70-19.5 • 10-15 • 750-15 • 825-15 • 8.5/9.5-17.5 • 10-16.5 • 300-15
5097	SL - 6	714 x 440 mm / 28 x 17.3 in	8-17.5 • 700-16 • 205/75-16 • 235/75-15 • 215-15 • 205/75-17.5 • 215-14 • 700-15 • 28x9-15 • 250-15 • 215/75-17.5
5098	SL - 4	650 x 430 mm / 25.6 x 17 in	195-14 • 205-14 • 185-15 • 600-16 • 650-16 • 7-17.5 • 175/75-16 • 185-16 • 195-16 • 700-12 • 27x10x12
5099	SL - 2	610 x 380 mm / 24 x 15 in	165-14 • 165/70-14 • 175-14 • 175-70-14 • 185-14 • 185/75-14 • 7.50-10 • 23x10x12 • 7.00-12 • 165-13
5100	SL - 1	530 x 390 mm / 20.8 x 14.9 in	23x9-10 • 650-10
5101	SL - 0	506 x 335 mm / 19.9 x 13.1 in	21x8-9 • 600-9
5102	SMALL	510 x 350 mm / 19.5 x 14.1 in	18x7-8 • 500-8 • 200x50-10
5103	18x13	457 x 330 mm / 18 x 13 in	16x6-8 • 15x4-1/2-8 • 500-8 • 400-8 • 18x7-8

Curing Tubes

- Designed for the tire retreading process, curing tubes provide internal pressure during vulcanization to support consistent curing and a secure bond between the tire casing and the new tread.
- Available in a range of sizes for tractor and OTR/EM tires.

Curing Tubes For Tractor

Item No.	Size
5118	11.2 / 12.4 R24
5119	14.9 / 16.4 R24
5120	14.9 / 16.9 / 18.4 R28
5122	14.9 / 16.9 / 18.4 R30
5125	16.00 / 18.00 R25; 15.5 / 17.5 R25
5126	14.9 / 16.9 / 18.4 R34
5127	12.4 / 13.6 R38
51271	14.9 / 15.5 R38
51281	20.8 R38



Curing Tubes For OTR / EM

Item No.	Size
5131	KM 24 13 / 14.00 R24

Accessories

Item No.	Description	Dimensions (mm)
1136	Wicking Pad, Super Single	1385 x 165
1138	Wicking Pad, Truck	1250 x 175



Item No.	Description	Format	Quantity
6900*	Special Silicone for Detaching Envelopes / Bladders	Can	20 L

*Item not shown

WORKSHOP EQUIPMENT
Bead Breakers & Accessories

Bead Breakers

- Bead Breakers are expertly engineered and manufactured in Italy by our dedicated team of in-house experts. They are world-renowned for their long-life span, durability, and unrivalled performance.

Hydraulic Bead Breakers


254L


254SP


254SP LONG


254S


254A AGRICOL


253S


255STURNABLE


256S


273


255S

Item No.	Description	Power (kg)	Weight (kg)	Rim Size (in)	Application
254A AGRICOL	Hydraulic Bead Breaker - Truck & Tractor	3850	8.5	Up to 25	3 Piece Rims
254L	Hydraulic Bead Breaker - Truck & Tractor	3850	8.5	Up to 25	3 Piece Rims
254SP	Hydraulic Bead Breaker - Earthmover	4700	18.5	25 to 57	3 Piece Rims
254SP LONG	Hydraulic Bead Breaker - Earthmover	4700	17.4	25 to 57	3 Piece Rims
254S	Hydraulic Bead Breaker - Truck & Tractor	4700	17	25 to 57	3 Piece Rims
253S	Hydraulic Bead Breaker - Turnable	6150	5.2	—	Truck & Agricultural
255S	Hydraulic Bead Breaker - Earthmover	19700	8	25 to 51	5 Piece Rims
255STURNABLE	Hydraulic Bead Breaker - Turnable	19700	8	25 to 51	5 Piece Rims
256S	Hydraulic Bead Breaker - Earthmover	19700	8	25 to 51	5 Piece Rims
273	Hydraulic Bead Breaker - Giant OTR		24.5	51 to 63	

Manual Bead Breakers

Item No.	Description	Weight (kg)	Tire Size (in)	Application
256	Manual Bead Breaker - Earthmover	18	25 to 36	3 & 5 Piece Rims
256 LARGE	Manual Bead Breaker - Earthmover	25	25 to 50	3 & 5 Piece Rims


256

Specialty Bead Breakers

Item No.	Description	Weight (kg)
Y471120	5T Bead Breaker for 2, 5 and 10-hole wheels, including single, double and triple-piece rims, featuring a 120 mm stroke, self-retracting design and corrosion-resistant finish.	20
GAIGTABB-01	Lightweight pneumatic bead breaker for agricultural, ATV, passenger and truck tires, featuring durable construction, weighing just 17 lbs and includes a blow case for storage.	7.7

Bead Breaker Kits

Item No.	Description	Capacity	Weight (kg)	Height (mm)	Width (mm)	Depth (mm)
Y471180	Wheel Breaker Kit in Metal Casing	10 t	15	150*	480*	235*

Adapter Clearances 10 / 25 / 50 / 87–125 mm

*Case Dimensions




Y471180

Bead Breaker Accessories

Item No.	Description
257	Central Hydraulic Unit, 700 Bar, 1.4Lt
259	Flexible Hose, 2000mm Length
254A23	Claw for rims inner side, 135 mm Lenght
254S1	Claw for rims inner side, 210mm Length
254S2	Claw for rims inner side, 250mm Length
255SH9A	Claw for 255S - 30x8x78x43mm
255SH9B	Claw for 255S - 29x10x78x43mm
255SH9C	Claw for 255S - 36x10x100x50mm
255SH9D	Claw for 255S - 30x9x85x37mm



257



254S2



254A23



259



254S1



255SH9A



255SH9B



255SH9C



255SH9D

Mount/Demount Tools

- A professional range of tools designed to make tire mounting and demounting safer, easier and more efficient. From tire irons and bead breaking tools to lock ring tools and specialist levers, the range provides the strength, leverage and durability required for demanding tire service applications.

Bead Bazookas

The BEAD BAZOOKA® delivers powerful, fast and effortless tire bead seating, making even the most stubborn tire installations quick and efficient.

- More powerful, lighter, faster and safer than conventional bead seaters, making it an essential tool for professional tire service.
- Advanced Rapid Air Release (RAR) valve technology delivers an instant, high-volume air blast for reliable bead seating, while allowing for a more compact and manageable design. Durable anti-corrosion inner tank coating helps extend service life and maintain performance in demanding workshop environments.

Item No.	Description	Max. Pressure	Weight (kg)
GBB3L2	3 Litre Bead Bazooka	145 PSI / 10 Bar	6.3
BB06L2	6 Litre Bead Bazooka	145 PSI / 10 Bar	7.7
GBB10L2	10 Litre Bead Bazooka	145 PSI / 10 Bar	9.5
GBB14L3*	14 Litre Bead Bazooka	116 PSI / 8 Bar	6.5
GB-5MA*	19L Bead Booster, 2" Rapid Air Release Valve	116 PSI / 8 Bar	12.8
GB-38L*	38L Bead Booster, 3" Rapid Air Release Valve	116 PSI / 8 Bar	8.5

*Item not shown



GBB3L2



BB06L2



GBB10L2

Tire Irons

Item No.	Description	Model	Length (cm)	Stock (mm)	Weight (kg)
KEN34645	Super Duty Tubeless Truck Tire Iron	T45A	94	19	2.1
KEN34647	Super Duty Tubeless Truck Tire Iron	T45HD	104	22	3.2
KEN34747	Straight Mount/Demount Tire Iron	T46A	91	19	2
KEN34847	Super Duty Tubeless Truck Tire Iron	T47A	132	25	5



KEN34645

Michelin Levers

Item No.	Description	Model	Length	Application
1060	Michelin Tire Lever	HALTE	80 cm	Tubeless truck tires on 15° drop-center rims
1289	Michelin Tire Lever	FORCE	75 cm	Agricultural and truck tubeless tires on large-section drop-center rims



1060



1289

Lock Ring Tools

Item No.	Description	Model	Length (cm)	Stock (mm)	Weight (kg)
KEN33223	Truck Lock Ring Removal Tool	T23A	76	17.5	1.4
KEN34648	Heavy-Duty Lock Ring Tool	T48A	94	19	2.1



KEN33223

Bead Breaking Tools

Hammers & Wedges

Item No.	Description	Model	Length (cm)	Head Weight (kg)	Weight (kg)
KEN35425	Heavy Duty Tire Hammer – Fiberglass Handled	TG36	46	2.6	2.7
KEN35429	Fiberglass Handled Bead Breaking Wedge	TG11E	81	-	5



KEN35429



KEN35425

Bead Breaking Irons

Item No.	Description	Model	Length (cm)	Stock (mm)	Weight (kg)
KEN32126	Driving Iron	T26A	30	32	2
KEN33342	Bead Breaking Iron	T42	76	22	2.2
KEN33341	Swan Neck Leverage Bar	T41	76	22	2.4
KEN34652	Bead Breaker Leverage Bar	T52	84	22	2.5



KEN33342



KEN32126

Truck Tire Mount & Demount Tools

Item No.	Description	Tire Size	Application
TNT-100	Truck Tire Mount/Demount Tool	17.5"–24.5"	Tubeless truck tires and Super Singles up to 315
1003	Tire Removal Lever	—	For removing and refitting wheels from vehicle hubs



TNT-100



1003

Tubeless Truck Tire Mounting & Demounting System

- All-in-one solution for mounting and demounting tubeless truck tires, including super singles and low-profile tires. Cost-effective and easy to use thanks to the smart leverage design.

Item No.	Description	Tire Size (in)	Weight (kg)
12880E	Bead Saver System	17.5"–24.5"	35



12880E

Impact Wrenches

- Powerful pneumatic impact wrenches designed for demanding tire service and workshop applications. Available in a range of drive sizes and torque outputs, providing reliable performance for the fast removal and installation of wheel nuts and other heavy-duty fasteners.

Item No.	Drive	Max. Torque Reverse (NM)	Free Speed (rpm)	Weight (kg)
CP7782-6	1"	2600	5200	11.6
CP5000	1"	3390	3700	16.2
CP7748	1/2"	1300	7000	2.0



CP7782-6



CP7748



CP5000

Tire Changing & Handling Equipment

Tire Spreaders

Item No.	Description
982	Manual Tire Spreader W/Stand
ATR2	Tire Expander For Inspection - EU
GTS-01	Tire Spreader For Repair


982


GTS-01

Lifts & Caddies

Item No.	Description
Y471147HD	Heavy-duty tire handling cart featuring patented Loadshift™ technology, with a 200kg capacity and suitable for tires up to Ø760mm.

Air/Hydraulic Jacks

- Air/hydraulic jacks for lifting heavy vehicles in workshop and roadside service applications. Available in standard, low-profile and telescopic configurations to suit different lifting requirements.

Item No.	Description	Capacity	Weight	Base Plate	Minimun Height	Lift Height	Adjusted Height	Maximum Height
Y432020	Air Bottle Jack	20 t	16.5 kg	220 × 175 mm	245 mm	150 mm	80 mm	475 mm
Y432021	Low Profile Air Bottle Jack	20 t	9 kg	180 × 115 mm	148 mm	67 mm	45 mm	260 mm

Item No.	Description	Capacity	Weight	Minimum Height
Y432032	Telescopic Air Service Jack	32/16 t	38 kg	150 mm


Y432020


Y432021


Y432032

Floor Jacks

- Floor jacks designed for vehicle lifting in workshop and service applications. The range includes lightweight aluminium models, low-profile designs and higher-capacity workshop jacks for different vehicle types and access requirements.

Item No.	Description	Capacity (t)	Weight (kg)	Minimum Height (mm)	Maximum Height (mm)
Y411350	Aluminium Racing Jack	1.35	10	80	375
M411355	Aluminium/Steel Turbo Lifter	1.5	14	90	360
Y411202	Aluminium/Steel Turbo Lifter	2	22	86	418
Y420250+	Turbo Ultra Low Garage Jack +Series	2	32	75	510
Y420333+*	Turbo Lifter +Series	3	37	76	503
Y420330+*	Garage Jack +Series	3	31	120	450

*Item not shown


Y411202


Y411350


M411355


Y420250+

Bottle Jacks

- Highly versatile and suitable for a wide range of applications, including pushing, bending, pressing and straightening. The range features a cast iron base, polished main ram and solid chromed pump piston.



Y410400



Y412001

Item No.	Description	Capacity (t)	Weight (kg)	Base Plate (mm)	Minimum Height (mm)	Lifting Height (mm)	Adjusted Height (mm)	Maximum Height (mm)	Box Qty.
Y410400	Bottle Jack	4	3.3	112 × 104	180	110	60	350	1
Y411100*	Telescopic Jack	10	6.4	180 × 118	120	100	6 & 45	220	1
Y412001	Bottle Jack – Short Body	20	9	155 × 140	190	90	60	340	2
Y412000*	Bottle Jack	20	10.5	155 × 140	244	145	60	449	1

*Item not shown

Vulcanizing Equipment

Universal Thermo Presses & Accessories



717



716



71501



71505



71504

71502



Item No.	Description	Specification
716	Universal Thermopress	For car, light truck and inner tubes
717	Universal Thermo Press	For car, truck, tractor and earthmover tires
71503*	Adjusting Bag	170 × 140 mm
71507*	Pressure Equalising Cushion	200 × 200 mm
71504	Pressure Equalising Cushion	200 × 300 mm
71501	Heating Plate	150°C, 180 × 100 mm
71502	Thermostat for Thermo Press	—
71505	Heating Plates, 2 Pieces	170°C, 150 × 220 mm

*Item not shown

Monaflex Tire Repair Systems

Portable hot vulcanisation systems for professional tire repair and retreading operations.

With more than 60 years of experience in tire repair, Monaflex provides a flexible and proven solution for the repair of **truck, agricultural and OTR tires**. Designed for professional workshops, the system combines controlled heat with consistent air pressure to create strong, distortion-free vulcanised repairs while helping reduce repair times and extend tire service life.

Unlike traditional heavy repair equipment, Monaflex systems are **lightweight, portable and easy to set up**, while their modular design allows retreaders to select the components required for the tire sizes they handle today and expand the system as their business develops. The technology uses flexible heat pads together with heavy-duty inflatable airbags that conform to the tire profile and apply pressure precisely where it is required.

The Monaflex system delivers five key advantages:

1. **FASTER REPAIRS**
   Heat is applied uniformly from both inside and outside the tire, allowing the repair components to be cured simultaneously and helping reduce curing time.

2. **LONG-LASTING, CONSISTENT REPAIRS**
   Heavy-duty inflatable airbags conform to the tire profile and provide consistent pressure, producing a smooth, distortion-free repair.

3. **TOUGH DESIGN & PROFESSIONAL QUALITY**
   Durable heat pads and hard-wearing airbags are designed for demanding workshop environments and backed by stringent manufacturing quality controls.

4. **PORTABLE & EASY TO USE**
   Compact components and straightforward assembly make the system easy to operate, transport and store, without the need for traditional heavy machinery.

5. **A SYSTEM THAT GROWS WITH YOUR BUSINESS**
   Start with the components required for your current tire range and add further components as your repair capabilities expand. This makes Monaflex particularly suitable for retreading operations handling different tire types and sizes.





Monaflex Vulcanizing Systems

- TECH has experts on hand to help you custom build repair systems to suit your needs.
- The options shown represent customized sets for the most popular tire sizes.
- Contact our team for a tailored offer built to meet your specific system requirements.

OTR Classic TRUCK + AG + OTR REPAIR SYSTEM (tire sizes section width 8.25-29.5)

- Radial and Bias tires





Item No.	Description
M100	Control Panel - Controls 2 Heat Pads And 3 Airbags. Classic Connectors
TR2213H (220V)	Heat Pad Lead Length 1m
TR2210H (220V)	Heat Pad Lead Length 1m
TR911/13W FRB	Flat Round Airbag Window
TR1315/15W FRB	Cylinder Airbag Window
TR2213E (4 Strap)	External Curing Pack
TROC4	Set Of Four Troc Straps (Use With TR2213E)
TR1315/20W FRB	Flat Round Airbag Window
M1721/24W FRB	Flat Round Airbag Window
M4824W	Flat Airbag Window
M2519H	Heat Pad OTR
M3015H	Heat Pad OTR
TR2621H	Heat Pad OTR
TR2621E	External Curing Pack
TROC5XL	Set Of Six Straps

TRDD Classic TRUCK REPAIR SYSTEM (tire sizes section width 8.25 - 445/65)


- Suitable for tire sizes from 8.25 section up to 445/65, covering a wide range of popular commercial tire sizes, including but not limited to:
- 215/75R17.5 225/75R17.5 235/75R17.5 245/70R17.5 245/70R19.5 265/70R19.5 275/70R22.5 285/70R19.5 295/60R22.5 295/80R22.5 315/80R22.5 315/60R22.5 315/70R22.5 355/50R22.5 385/55R22.5 385/65R22.5 385/55R22.5 385/65R22.5 12R22.5 13R22.5 425/65R22.5 435/50R19.5 445/45R19.5 445/65R22.5 280/85R20





Item No.	Description
TRRS D	Control Panel - Controls 2 Heat Pads And 2 Airbags.
TR2213H (220V)	Heat Pad Lead Length 1m
TR2210H (220V)	Heat Pad Lead Length 1m
TR911/13W FRB	Flat Round Airbag Window
TR1315/15W FRB	Cylinder Airbag Window
TR2213E	External Curing Pack
TROC4	Set Of Four Troc Straps (Use With TR2213E)

TRRS D Classic AG REPAIR SYSTEM (tire sizes from 250/85 to 900/70)

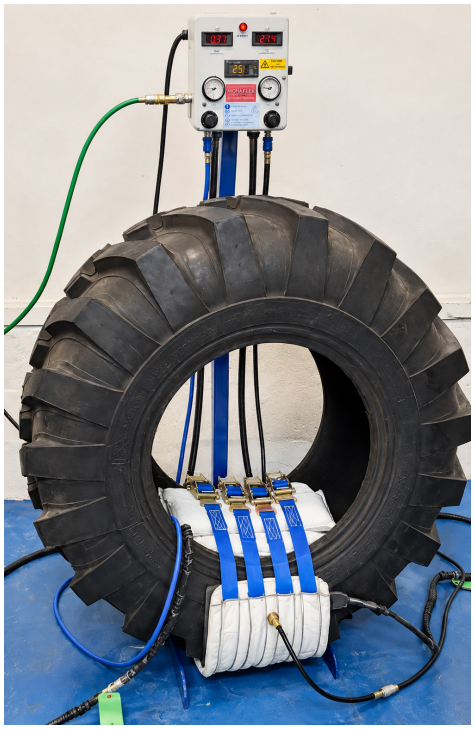

Item No.	Description	Qty.
TRRS D	Control Panel - Controls 2 Heat Pads And 2 Airbags (3 With Adator). Classic Connectors	1
TR911/13W FRB	Flat Round Window Airbag Window	1
TR1315/15W	Cylinder Airbag Window	1
TR1315/20FRB	Flat Round Window Airbag Window	1
M1518/24W FRB	Flat Round Window Airbag Window	1
M1721/24W FRB	Flat Round Window Airbag Window	1
M2124/24W	Cylinder Airbag Window	1
M2732/24W	Cylinder Airbag Window	1
M3624W	Flat Airbag Window	1
TR2213H	Heat Pad	2
TR1413H	Heat Pad	1
TR2621H	Heat Pad	2
M3624W	Flat Airbag Window	1
TR2621E	External Curing Pack	1
TROC5XL	Set Of Straps (Use With TR2621E)	1
TR2213E	External Curing Pack	1
TROC4	Set Of Four Troc Straps (Use With TR2213E)	1
MVS 5001/114	Trrs Extended Airline Deviation Adaptor	1

BRS - Bead Repair System (Bead Repairs in Tire Sizes 8.25 to 12.00R24)




Item No.	Description
MVN100 ET	Control Panel With Electric Timer
BRS H	Housing
MVS5001/112	Air Line With Pressure Gauge
BRS126H	Heat Pad
BRS167	Flat Air Bag
BRSPP	Pressure Pad
MVS1900/250	Repair Stand (Optional)

O-Rings & L-Rings

O-Rings

- Standard and Arctic O-Rings for tubeless rims are manufactured to OEM specifications for a wide range of multipiece rim O-ring grooves. O-rings are produced in a standard compound for -40°F to 158°F (-40°C to 70°C).

Item No.	Application	Rim (in)	Rod (in)	Bag Qty.
OR-20-JM	Highway (JM)	20"	0.26"	2
OR-22-JM	Highway (JM)	22"	0.26"	2
OR-24-JM	Highway (JM)	24"	0.26"	2
OR-25-T	Earthmover (Small)	25"	0.26"	2
OR-25-TMS	Earthmover (Small)	25"	0.312"	2
OR-215-H	Grader	15"	0.28"	2
OR-220-TG	Grader	20"	0.26"	2
OR-224-TG	Grader	24"	0.26"	2
OR-225-T	Grader	25"	0.26"	2
OR-324-T	Earthmover	24"	0.385"	2
OR-325-T	Earthmover	25"	0.385"	2
OR-329-T	Earthmover	29"	0.385"	2
OR-332-T	Earthmover	32"	0.385"	2
OR-333-T	Earthmover	33"	0.385"	2
OR-335-T	Earthmover	35"	0.385"	2
OR-339-T	Earthmover	39"	0.385"	2
OR-345-T	Earthmover	45"	0.385"	2
OR-349-T	Earthmover	49"	0.385"	2
OR-451-T	Earthmover	51"	0.50"	2
OR-457-T	Earthmover	57"	0.50"	2
OR-463-T	Earthmover	63"	0.50"	2

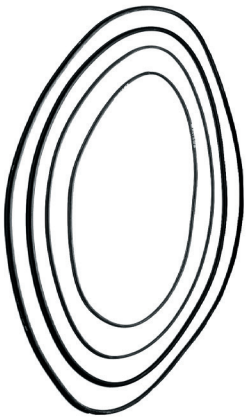

L-Rings

- L-Rings provide an effective sealing solution for earthmover and OTR rims, helping maintain an airtight fit when tire bead and rim compatibility issues occur.

Item No.	Application	Dimensions Ø	Bag Qty.
LR-16	Earthmover	16"	1
LR-20	Earthmover	20''	1
LR-24	Earthmover	24''	1
LR-25	Earthmover	25''	1
LR-29	Earthmover	29''	1
LR-33	Earthmover	33''	1
LR-35	Earthmover	35''	1
LR-39	Earthmover	39''	1
LR-45	Earthmover	45''	1
LR-49	Earthmover	49''	1



Tire Inflation Tools & Accessories

- A range of pressure gauges and air chucks for checking and inflating tires across passenger, commercial and heavy-duty applications. Includes low-pressure, dual-foot, lock-on and clip-on options for different valve configurations.

Tire Inflation Gauges

- Built for workshop performance, these tire inflation gauges offer exceptional accuracy and durability.
- Fully compliant with European standards, they deliver accurate and dependable performance for professional tire inflation applications.

Item No.	Description	Scale
TW1991	Eurodainu 1991, for standard valves	Dual Graduated Bar (0.7-12) PSI (10-174)
2015	Eurodainu 2015, for standard valves	Bar Graduated Only (0.7-11) PSI
TW1999*	Superdainu 1999, for standard valves	Dual Graduated Bar (0.7-10) & PSI (10-145) or kPa x 100 (0.7-10)
RJW1950*	Eurodaira 1950, Dial gauge with dual foot chuck for standard bore valves	Dual Graduated Bar (0.7-12) - PSI (10-174)
VH652	Heavy-Duty Inflating Gauge, lightweight aluminium body with brass movement. 3-sided bar, 2 sides calibrated 10–120 psi in 2 lb. increments. One side kPa 70–800. 6 ft., 1.82 m hose with clip-on air chuck. OSHA compliant.	

*Item not shown


TW1991


2015


VH652

Air Chucks

Item No.	Description
VH688	Open End European Style Air Chuck And Clip for use on in-line gauges, barbed end
VH689	Closed End European Style Air Chuck And Clip, barbed end
VH694	Open Check Lock-On Chuck securely locks onto valve when pushed forward. Released when sleeve is pulled back. For use on air-line gauges, 1/4" female N.P.T.
VH695*	Closed Check Lock-On Air Chuck securely locks onto valve when pushed forward. Released when sleeve is pulled back. 1/4" female N.P.T.
VHJ6105	Clip-On Air Chuck for large bore. Locks on valve when clip is pushed forward. 1/4" female N.P.T.
HT-340-2*	Air Chuck, 12V1, Zinc

* Item not shown


VH688


VH689


VH694


VH6105

Dual Foot Chucks & Gauges

Item No.	Description
VHI698	Dual Foot Straight-On And 30° Reverse Angle Lock-On Air Closed Chuck, for hard-to-reach valves on tractor, dual-wheel truck and bus tires, 1/4" female N.P.T., nickel plated
T-3029	AC429 270mm Dual Foot Air Chuck
VH663	Low Pressure Pocket Air Gauge, 4-sided nylon bar, 2 sides calibrated 1–20 psi in 1/2 lb. units. Other 2 sides kPa 10–135.
VHI665	Dual Foot Service Gauge, 2-sided nylon bar, one side calibrated 10–50 psi in 2 lb. units. Numbers at 10 lb. intervals. Other side kPa 80–1040.


VHI698


T-3029


VH663


VHI665

Storage

- A single locking door keeps your valuable items secure, while a slide-out drawer makes it easy to organize smaller items like valves, loose patches, TPMS sensors and more.
- Four hangers keep your most-used tools at reach for easy access.





Item No.	Description
100	TECH Repair Cabinet

Notes

Notes

Customers around the World trust TECH for complete Tire Repair and Wheel Service Solutions.



Tools & Equipment Catalogue

Koeybleuken 16, 2300 Turnhout, Belgium

+32 14 423 103 techeurope@trc4r.com techeurope.com

Copyright 2026, TECH